


Quick User Guide







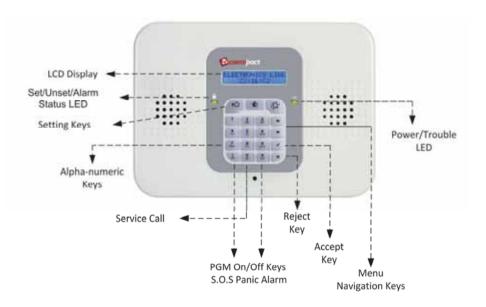

Thank you for choosing **CommPact** wireless intruder control panel. This quick start guide describes the main user operating actions of the **CommPact**. To download the full version of the CommPact User Manual go to www.riscogroup.co.uk, enter the Downloads menu and select Electronics Line Manuals.

| Full Set | Press Press | | | | | | | | | |
|---|---|---|--|--|--|--|--|--|--|--|
| Partial Set | Press | If required, enter your user code | | | | | | | | |
| Perimeter Set | Press | | | | | | | | | |
| Unset | Enter your user code | In addition, silences the siren in alarm event | | | | | | | | |
| Panic alarm | Press and hold down | n 505 + 505 | | | | | | | | |
| Fire alarm | Press and hold down | Press and hold down + DEF | | | | | | | | |
| Medical alarm | Press and hold down | Press and hold down 4+ 6 | | | | | | | | |
| Check system trouble | s Press and scrol | Press and scroll the list Additionally, silences any trouble tones | | | | | | | | |
| Global Chime | Press | | | | | | | | | |
| Access Menu Mode | de Press then [User Code] | | | | | | | | | |
| Service Call | Press and then | hold t | | | | | | | | |
| Turn On / Off PGM | * 30 ★ 30 | | | | | | | | | |
| LEDs Indication In case of System Trouble, press ▼ to identify the problem. | Off: System unset Green: System set Flashing red: Alarm | 'OK' LED: Green: Power OK Yellow: System trouble Flashing green: Open zone Flashing yellow: (Slow) Low battery, (Fast) AC loss. | | | | | | | | |





Edit/Delete User Code

- 1. From the main display press .
- 2. Enter master code (Default code 1234).
- 3. Select [4] User Code and press
- 4. Select a user and press
- 5. Select [1] Edit Code.
- 6. Edit the user code or enter 0000 to delete.
- 7. Press

Omit a Zone

- 1. From the main display press .
- 2. Enter master code (Default code 1234).
- 3. On the main menu, press [21].
- 4. Select a zone and press toggle.
- 5. To save the status, press

SMS Control Commands

Controlling the System through SMS

SMS Structure:

[Free text - Up to 43 characters][#][User Code][Command]

Example:

UNSET#1234120

| Optional Free Text | | | | | User Code | | | Command | | | | |
|--------------------|---|---|---|---|-----------|---|---|---------|---|---|---|---|
| U | N | S | Е | Т | # | 1 | 2 | 3 | 4 | 1 | 2 | 0 |

Command Code Numbers:

120: Unset

121: Full set

122: Part set

123: Perimeter set

030: PGM off

130: PGM on

200: System set status

Telephone Control Commands

- 1. Dial the number of the premises
 - o If your system is connected to a regular phone line dial the number of the panel and wait for three rings then hang up. Wait at least five seconds and dial the number again. On the second ring the control system answers and sounds two tones.
 - If your system supports cellular communication dial and wait until the system answers and two tones are heard.
- 2. Within 15 seconds, enter the Telecontrol Code (code 29). After a tone sounds, press:

3: Full set 2: 2 Way Audio

6: Unset **430:** PGM on **7:** Extend the call **530:** PGM off

9: Cancel sounder *#: Disconnect the line





Keyfob









Register to MyELAS

- 1. Go to www.MyELAS.com/register.
- 2. Fill in your first name and last name.
- 3. Enter your email address as Login Name (required for 1st time activation and can be altered later)
- 4. Define password (minimum of 6 characters and at least one digit) and confirm.
- 5. Enter in the 15 digit Panel ID as it appears on the sticker located on the side of the panel.
- 6. Complete registration form and press the Register Button.
- To complete registration open the email message received on the email account you defined as Login Name.

Login to MyELAS

- 1. Go to www.MyELAS.com.
- 2. Enter User Name and Password that you supplied during the registration process.
- 3. Enter Passcode (CommPact User Code).
- 4. Click the Enter button.

You can also login to MyELAS using your Smartphone: Download MyELAS app from the Apple App store or the from Google play store for android devices.